
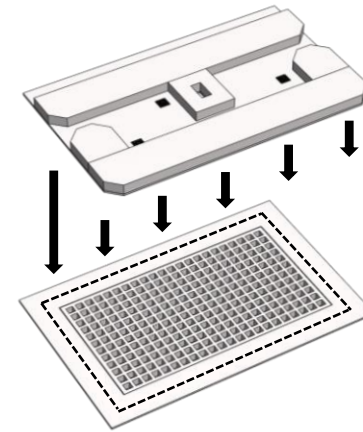


STANDARD CONSTRUCTION DETAIL (PAGE 1 OF 1)

GRIZZLY MAT™- INLET FILTER MAT

DETAIL A – TYPE-C INLET (SIDEWALL)

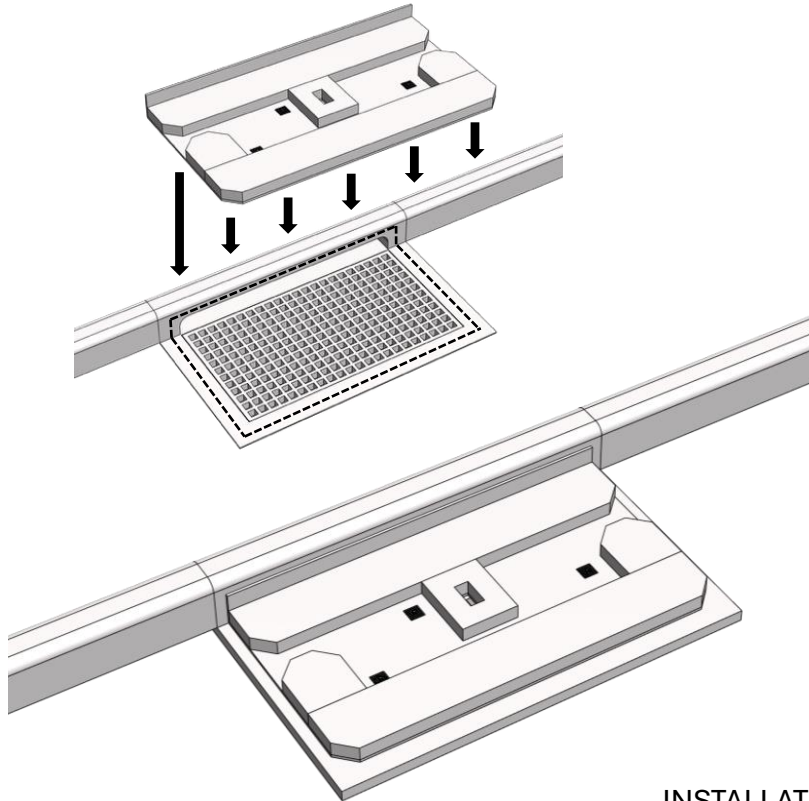

DETAIL B – TYPE-M INLET



HalenHardy®

Simplify Spill and Sediment Control™

814-822-2004

WWW.HALENHARDY.COM

INSTALLATION

- CLEAR AWAY ANY DIRT, TWIGS, LEAVES, ETC. AWAY FROM PERIMETER OF INLET.
- CENTER MAT ON TOP OF METAL GRATE. SLIGHTLY MOVE UNTIL MAGNETS GRAB.
- FOR TYPE-C INLETS, POSITION SIDEWALL FLAP VERTICALLY. FOR TYPE-M INLETS, FLAP LIES FLAT ON GROUND.

MAINTENANCE AND DISPOSAL

- BRUSH OFF MUD AND DEBRIS AFTER RAIN EVENTS AND REPOSITION IF NEEDED.
- DISPOSE OF USED PRODUCT IN COMPLIANCE WITH LOCAL, STATE, AND FEDERAL REGULATIONS.